

TYPICAL STREET


GENERAL NOTES:

1. CROWN ON STREETS SHALL BE AS FOLLOWS:
 - a. 32' STREET = 4", PAVEMENT SLOPE = 2%
2. ALL SUBGRADE COMPACTION FOR C. & G. WILL EXTEND 12" MIN. ON EITHER SIDE OF C. & G. OR CURB SECTION.
3. SUBGRADE PREPARATION UNDER SIDEWALK AND DRIVEPADS SHALL BE INCLUDED WITH THE PARTICULAR ITEM.
4. FINISH GRADE AT PROPERTY LINE SHALL BE 0.33' MIN. ABOVE TOP OF CURB.

CONSTRUCTION NOTES:

- A. SIDEWALK AT STANDARD SETBACK.
- B. SIDEWALK ADJACENT TO CURB. (NON-STANDARD, VARIANCE REQUIRED).
- C. STANDARD C. & G.
- D. A.C. OR P.C.C. PAVEMENT.
- E. PRIME COAT
- F. COMPACTED BASE COURSE
- G. COMPACTED SUBGRADE.

SEE NOTE 4

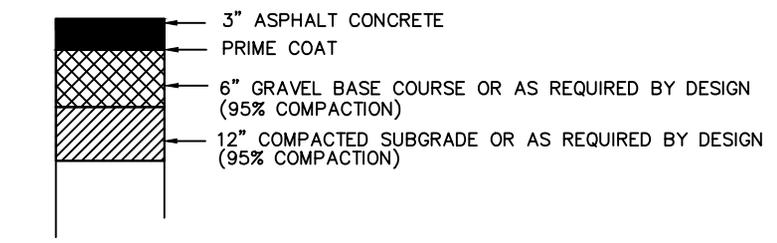

ASPHALT CONCRETE
PAVEMENT SECTION

STREET ROW	PAVEMENT WIDTH	CROWN
50'	32'	4"

STREET CROWN DATA

COUNTY OF BERNALILLO	
REVISIONS 15-FEB-16	MINOR LOCAL RESIDENTIAL
DWG. 201008 INT	