
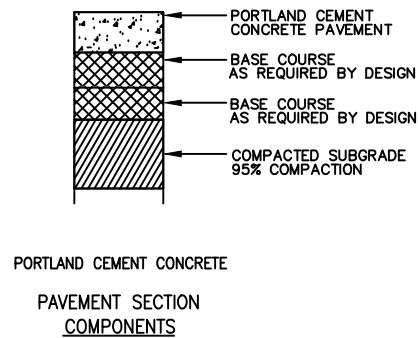


CONSTRUCTION NOTES:

- A. SIDEWALK AT STANDARD SETBACK.
- B. SIDEWALK ADJACENT TO CURB. (NON-STANDARD, VARIANCE REQUIRED).
- C. STANDARD C. & G.
- D. A.C. OR P.C.C. PAVEMENT.
- E. PRIME COAT
- F. COMPACTED BASE COURSE
- G. COMPACTED SUBGRADE.

GENERAL NOTES:

- 1. CROWN ON STREETS SHALL BE AS FOLLOWS:
 - a. 40' STREET = 5", PAVEMENT SLOPE = 2%
- 2. ALL SUBGRADE COMPACTION FOR C. & G. WILL EXTEND 12" MIN. ON EITHER SIDE OF C. & G. OR CURB SECTION.
- 3. SUBGRADE PREPARATION UNDER SIDEWALK AND DRIVEPADS SHALL BE INCLUDED WITH THE PARTICULAR ITEM.
- 4. FINISH GRADE AT PROPERTY LINE SHALL BE 0.33' MIN. ABOVE TOP OF CURB.

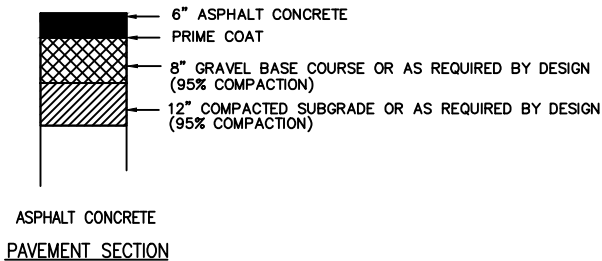

STREET ROW	PAVEMENT WIDTH	CROWN
60'	40'	5"

STREET CROWN DATA

COUNTY OF BERNALILLO	
REVISIONS 15-Feb-16	MAJOR LOCAL 60-FOOT ROW COMMERCIAL/INDUSTRIAL DWG. 201007 INT